

Lions Floor

TEST REPORT

SCOPE OF WORK

Haven Heights Laminate

REPORT NUMBER

260525003SHF-004

TEST DATE(S)

2026-05-25 - 2026-06-15

ORIGINAL ISSUE DATE

2026-06-30

PAGES


5

DOCUMENT CONTROL NUMBER

LFT-APAC-SHF-OP-10k(January 13, 2025)

© 2025 INTERTEK

Intertek Testing Services Shenzhen Ltd. Shanghai Fengxian Branch

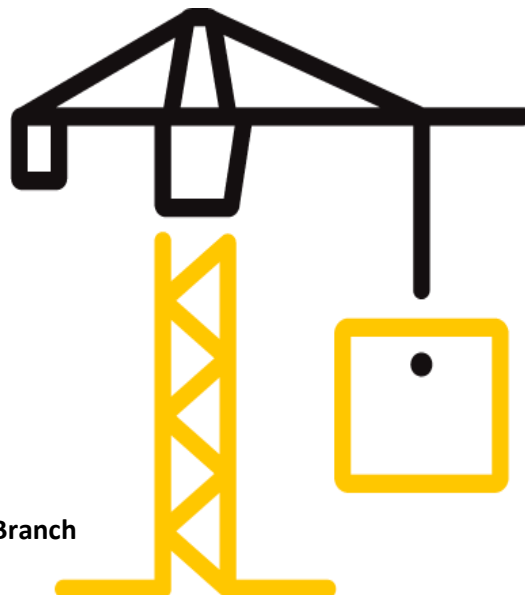

Test Report

Statement

- 1.This report is invalid without company's special seal for testing on the assigned page.
- 2.This report is invalid without an authorized person's signature.
- 3.This report is invalid if altered.
- 4.Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Don't copy this report in partial without any official approval in written by our company. This report is invalid without re-stamping the special seal for testing in copying report.
- 5.This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- 6.Except for the obligation, responsibility and liability (if any) for the appropriateness and professionalism of afore-mentioned testing itself within the scope and amount of the testing fee received, Intertek does not and will not accept any other obligation or liability.
- 7.If the Client has any questions about the test results, Intertek B&C should be informed within the storage period of the samples. The sample storage period ends 5 working days after the official report issue date. Samples of certification program are retained for the period required by the certification rules. The samples storage period shall be calculated according to the issue date of the original report in the case of quoting results and modifying reports.
- 8.Intertek B&C will service this report for the entire test record retention period. The test record retention period ends 6 years after this report original issue date. The test record retention period for certification program is 10 years. Test records and other pertinent project documentation will be retained for the entire test record retention period.
- 9.The report was digital signed by Shang Hai, Intertek Group plc, please using Adobe Acrobat Reader to verify the authenticity.



Test Report

Original Issue Date: 2026-06-30

Intertek Report No. 260525003SHF-004

Applicant: Lions Floor

Address: 7300 Somerset Blvd, Paramount, CA 90723

Attn: Mark

Test Type: Performance test, samples provided by the applicant.

Product Information

Product Name	Model	Specification
Haven Heights Laminate	LI-HH03	1515*237*10mm
Sample ID	Sample Amount	Sample Received Date
S260525003SHF.005	40 pcs	2026-05-17
Sample Description		
1515mm×237mm×10mm		

Test Methods And Standards

Test Standard	ASTM F2199-20
Specification Standard	/
Test Conclusion	The samples were tested according to the above standards, and the results are shown in the following page.

Note:

1.This report does not involve sampling. The report only reflects conformity of the tested items of the samples provided by the applicant. Representativeness and authenticity of the submitted samples are responsibilities of the applicant.

Report Authorized



Daniel Zhang Erin Huang
Name: Daniel Zhang Name: Erin Huang
Title: Reviewer Title: Project Engineer

Test Report

Original Issue Date: 2026-06-30

Intertek Report No. 260525003SHF-004

Test Items, Method and Results:

Test Item: Dimensional stability and curling

Test Method: ASTM F2199-20

Conditioning:

Temperature: 23 °C

Relative humidity: 50 %

Duration: 24 h

Measure the initial length and curling

Test Condition:

Temperature: 82 °C

Duration: 6 h

Reconditioning:

Temperature: 23 °C

Relative humidity: 50 %

Duration: 24 h

Measure the final length and curling

Test Result:

Specimen	Dimensional stability (%)		Curling (in)
	Length direction/Machine direction	Width direction/Across machine direction	
1	-0.12	-0.11	0.138
2	-0.12	-0.08	0.100
3	-0.12	-0.10	0.111
Average	-0.12	-0.10	0.116
Max.	-0.12	-0.11	0.138

Note:

1. Dimensional stability = (final length - initial length)×100/initial length

A negative value indicates shrinkage, and a positive value indicates expansion.

2. Curling = final curling - initial curling = Curl

Express the average value to the nearest 0.001in

Test Report

Original Issue Date: 2026-06-30

Intertek Report No. 260525003SHF-004

Appendix A: Sample Received Photo



Front view & Back view



Revision:

NO.	Date	Changes
260525003SHF-004	2026-06-30	First issue